

## Product Information

# Sodium Methylate Solution, 25%

NM25

### CAS NUMBER

124-41-4

67-56-1

### PRODUCT DESCRIPTION

A solution of sodium methylate (25% in methanol), a strong base commonly used in organic synthesis and as a catalyst in transesterification reactions.

#### Typical Properties

Property	Unit	Value
Appearance		Clear, colorless liquid
Boiling Point, min.	°C	84
Chemical Name		Sodium methanolate in methanol
Density	g/cm <sup>3</sup>	0.94
Molar Mass	g/mol	54.02
Viscosity	mPa·s	25

The data represents typical values (no product specification)

### TYPICAL APPLICATIONS

Typically used as a catalyst or as a deprotonating agent in applications such as:


- Production of biodiesel
- Production of PVOH and EVOH
- Agro syntheses
- Vitamin production and other pharma syntheses
- Glycol ether production
- Methylation reactions, e.g., in polyethers
- Depolymerization of PET

#### Product Composition

Product Composition	Unit	Value
Effective Product Content	wt%	24.5-25.5
Calculated		
NaOH + Na <sub>2</sub> CO <sub>3</sub> Content, max.	wt%	0.5
Karl-Fischer titration		
Solvent Type		Methanol
Total Alkalinity		24.5-26.0
Titration		

The data represents typical values (no product specification)

### Vapor pressure of different sodium methylate solutions

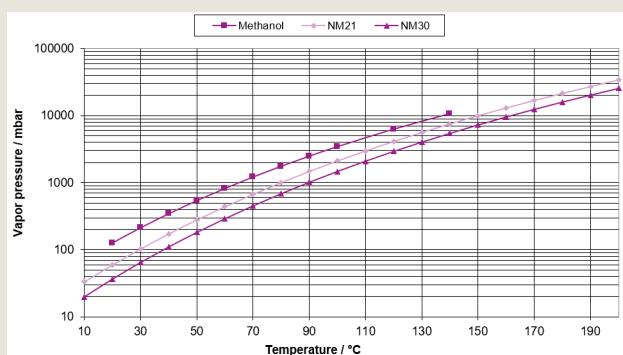


### BENEFITS & ADVANTAGES

- Low crystallization temperature
- Strong organic base
- Especially well suited for water-free organic syntheses
- Ready to use solution in methanol
- Available in very large quantities

### HANDLING & PROCESSING

Avoid air contact! Product quickly reacts with moisture from the air.

## Viscosity of different solutions of sodium methylate in methanol

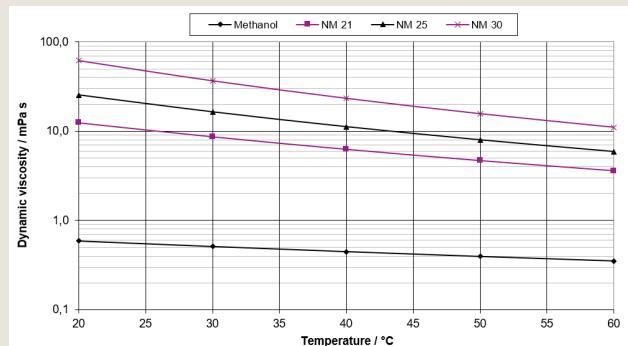

## Registration Listings

Registry	Status
EU (EINECS/ELINCS)	Yes
USA (TSCA)	Yes

## PACKAGING

- 190 kg drum
- bulk

## STORAGE

Store tightly closed in a cool and dry place below 30 °C.

During winter times at temperatures below 0 °C the active ingredient might start to precipitate. Warming up under agitation will help to solve the active ingredient again.

## SHELF LIFE

Recommended re-test of the product 24 months after production when stored dry and in original packaging.

### Disclaimer

This information and all further technical advice are based on our present knowledge and experience. However, it implies no liability or other legal responsibility on our part, including with regard to existing third-party intellectual property rights, especially patent rights. In particular, no warranty, whether express or implied, or guarantee of product properties in the legal sense is intended or implied. We reserve the right to make any changes according to technological progress or further developments. The customer is not released from the obligation to conduct careful inspection and testing of incoming goods. Performance of the product described herein should be verified by testing, which should be carried out only by qualified experts in the sole responsibility of a customer. Reference to trade names used by other companies is neither a recommendation, nor does it imply that similar products could not be used.

### Evonik Operations GmbH

Catalysts  
Rodenbacher Chaussee 4  
63457 Hanau  
Germany  
Phone +49 6181 59-13399  
Fax +49 6181 59-2699  
catalysts@evonik.com  
[evonik.click/catalysts](http://evonik.click/catalysts)